



REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2016/04/16	LGH

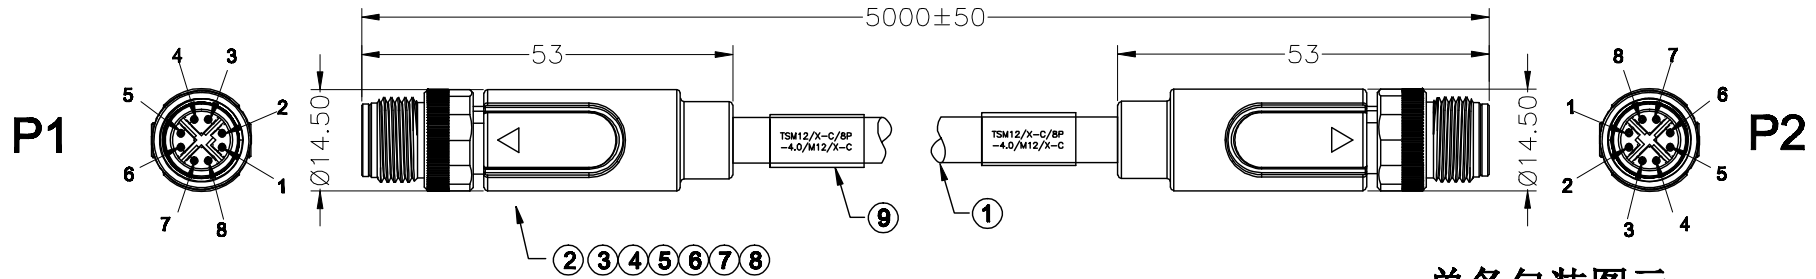


单条包装图示:

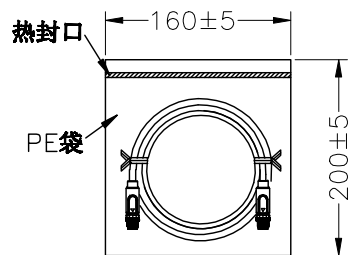

接线图

P1	PAIR	颜色	P2
1	X	白色	1
2	X	橙色	2
3	X	白色	3
4	X	绿色	4
5	X	白色	5
6	X	棕色	6
7	X	白色	7
8	X	蓝色	8
外壳		编织	外壳

- 注:
- 测试条件
 导通阻抗: 5Ω
 绝缘阻抗: 10MΩ
 电 压: DC 500V/0.1S
 - 所有材料都符合RoHS标准。
 - 去皮时, 先去外皮14mm, 然后用套管套住带铝箔的对绞线, 前端留5mm左右去皮上锡
 - 把胶芯装到WK00095内后, 用快干A/B胶点在塑胶芯与WK00095的间隙里, 最后套上屏蔽壳
 - 注塑外模水滴朝十字架凹槽突起处

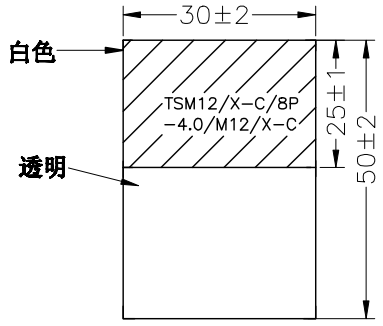

- 标签A规格描述:
- 材料: 丽龙.
 - 白底黑字.
 - 文本高度最大4mm, 字体为"Arial"

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
⑨	N/A	丽龙标签: L=50*30MM	2	PCS
⑧	PL00004	黑色 TPU 105°	12	g
⑦	N/A	白色快干A/B胶	4	g
⑥	TK00025	M12-X型公头屏蔽壳铜镀镍 Ø10*26.5	2	PCS
⑤	WK00122	M12-X型公头螺母黄铜镀镍 Ø14.5*14.75	2	PCS
④	CN00175	M12-X型公头(塑胶)	2	PCS
③	WK00095	M12-X型锌合金插头	2	PCS
②	TE00153-1	M12-X型线端Ø0.6公针 L=17.0mm 镀金1u''	16	PCS
①	CA00288	SSTP CAT6A 26AWG*4P+AEB 外被墨绿色PU OD=6.2mm L=4970mm	1	PCS

DRAWN BY		DATE	TITLE M12-X CODING 8P/M TO 8P/M CABLE	
CHECKED BY		DATE	SGN NO	REV.
APPROVED BY		DATE	DWG NO	A0
			CUSTOMER	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:		THIRD ANGLE PROJECTION
		DECIMALES	ANGLES	SIZE: A4 UNITS: mm
		.x ±0.15	x.' ±1.0'	SCALE: SHEET: 1 OF 1
		.xx ±0.10	.x' ±0.5'	