


PROJECT NO:
SGNYD1705001-1

REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2020/06/15	WANG
A1	增加三个长度	2022/11/08	LYG

P1

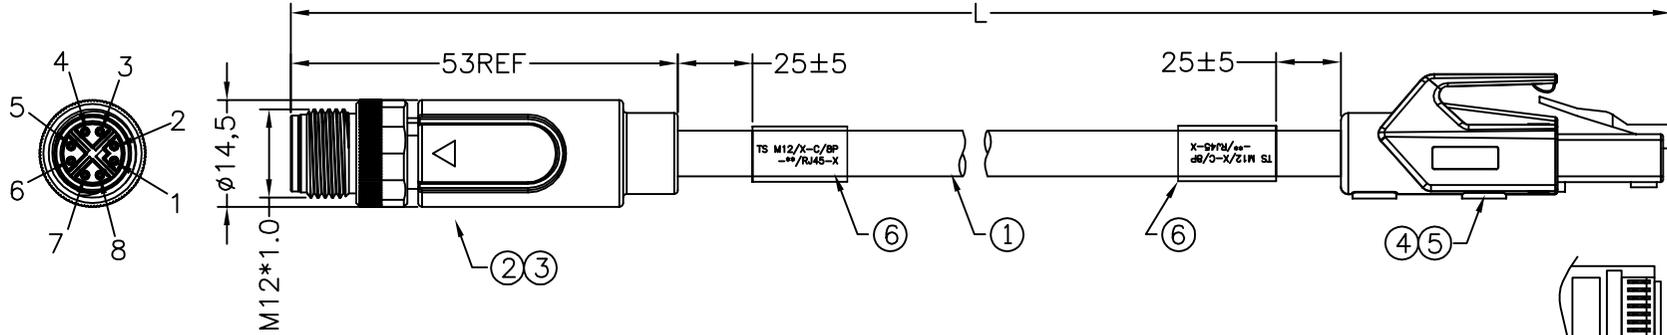

P2

客户料号 (标贴内容)	SGN NO	DRAWING NO	L(mm)	裁线长度(mm)
TS M12/X-C/8P-3.0/RJ45-X	120708-57-007	SGN01007-520	3000±30	2985±5
TS M12/X-C/8P-1.0/RJ45-X	120708-57-230	SGN01009-520	1000±30	985±5
TS M12/X-C/8P-1.5/RJ45-X	120708-57-231	SGN01010-520	1500±30	1485±5
TS M12/X-C/8P-5.0/RJ45-X	120708-57-008	SGN01008-520	5000±50	4985±5
TS M12/X-C/8P-30.0/RJ45-X	120708-57-232	SGN01011-520	30000±100	29985±20

说明:

1. 测试条件

导通阻抗: 5Ω MAX

绝缘阻抗: 10MΩ MIN



电压: DC 300V/0.1S

2. 所有材料都符合RoHS标准。

3. 防护等级: 连接器IP67/成型部份按客户具体要求

4. 100%开/短路测试或客户特殊要求测试

5. 模具编号: 公头;内模/外模SGW01144

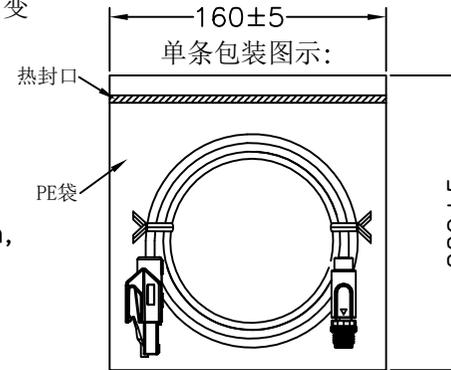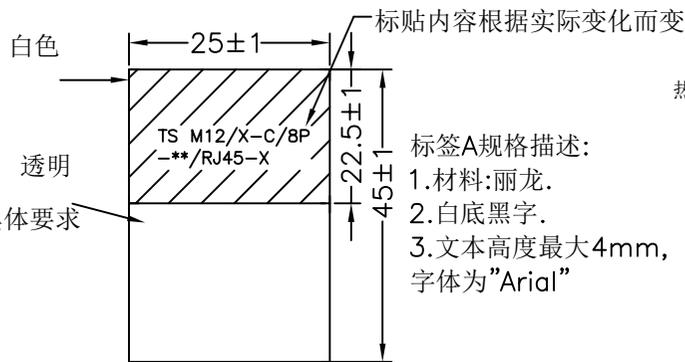

接线表

P1	PAIR	颜色	P2
1		白色	1
2		橙色	2
3		白色	3
4		绿色	6
5		白色	7
6		棕色	8
7		白色	5
8		蓝色	4
外壳		编织	外壳

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
⑥	LB00007	丽龙标签 L*W=25*45mm 一半白色一半透明不印字	2	PCS
⑤	WK00290	欧式RJ45黑色外壳 (不打标) (不带LOGO)	1	PCS
④	CN00217	水晶头8P8C 带铁壳, 装配式卡点	1	PCS
③	PL00004	黑色 TPU 105°	6	g
②	120708-20-024	M12X型8芯公头焊线成型式(带屏蔽), 需符合UL标准 (定制防水)	1	SET
①	CA00288	SFTP CAT6A 26AWG*4P+AEB 外被墨绿色PUR OD=6.2mm	1	PCS

SIGNAL[®]
Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE
M12-X CODING 8P/M TO RJ45 CABLE

SGN NO	见表格	REV.	
DWG NO	见表格		
CUSTOMER	见表格		A1

TOLERANCES ARE:	THIRD ANGLE PROJECTION
DECIMALES	ANGLES
.x ±0.5	x.' ±2.0'
.xx ±0.20	.x' ±1.0'

SIZE: A4	UNITS: mm
SCALE: 1:1	SHEET: 1 OF 1